

603

ASEP-TECH® Blow/Fill/Seal packaging system

Safeguarding Solutions Through
Innovative PACKAGING



- Large Bottle Format Machine
- Available in all electric servo motion configuration
- Stepped-base design for easy maintenance and changeover



Typical products produced with ASEP-TECH® Model 603 Blow/Fill/Seal packaging system




weilerengineering.com



603

ASEP-TECH® Blow/Fill/Seal packaging system

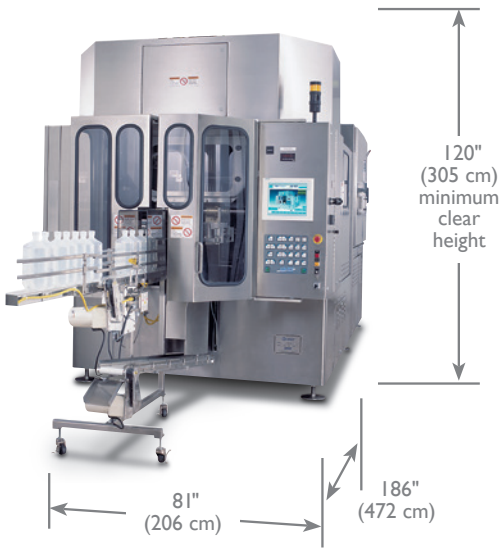

**Model 603
dimensions**

Number of Cavities	Container Size (mL)	Containers/Hour
7	1000	1350
8	500	1600
8	250	1750
10	250/500	2200
10	180	2400

Hourly output dependent upon container design and product characteristics. Chart above reflects LDPE resin and aqueous solutions. Customization available based on a customer supplied URS.

OPTIONAL ACCESSORIES FOR THE ASEP-TECH® BLOW/FILL/SEAL SYSTEM

- Parison shrouding to assure a Class 10,000 environment in the extrusion/parison cutoff zone
- Particle counter for on-line particulate monitoring in the critical zone
- UPS (Uninterruptible Power Supply)
- Chiller
- Vacuum system
- Resin conveyor/blender/granulator
- Recirculating product pathway
- Filter integrity test system
- DMS (Data Management System)
- Conversion size/format changes to mold tooling
- Cap Welder
- A variety of deflashing technology and mechanisms are available
- Mold temperature control unit



The machine depicted is a typical ASEP-TECH® Model 603 Blow/Fill/Seal machine. Dimensions may vary based on optional equipment. A minimum of 4' (122cm) should be provided on sides and front of machine for operation and service. This machine may be protected by one or more domestic or foreign patents. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.